



ATTENTION: IMPORTANT TOWBALL INFORMATION FOR THULE BIKE RACKS & TOWBALL MOUNTED PRODUCTS

THULE TOWBALL MOUNTED CARRIERS:


- VELOCOMPACT 926,
- VELOSPACE 918, VELOSPACE XT 938 & 939,
- EASYFOLD XT 933 & 934,
- EPOS 9781 & 9791,
- ONTO 9059 AND ARCOS TOWBAR PLATFORM

The above THULE carriers feature a precision towball coupling mechanism (the Hercules coupler) which is designed for use ONLY with 50mm towballs meeting the ISO1103 standard, as pictured below.

THULE carriers fitted with the Hercules coupler ARE NOT COMPATIBLE with 1 7/8" (47mm) towballs commonly fitted to vehicles in New Zealand, nor is the coupler compatible with "convert-a-ball" type towballs where the user can change between 1 7/8" and 50mm balls without demounting the towball shank



The towball must have a minimum of 75mm in overall height, and have a flat section on the underside of the ball. These styles are commonly referred to as a "European towball". Towballs that do not meet this criteria will result in the clamp mechanism engaging incorrectly leading to either coupler damage, or an insecure carrier.

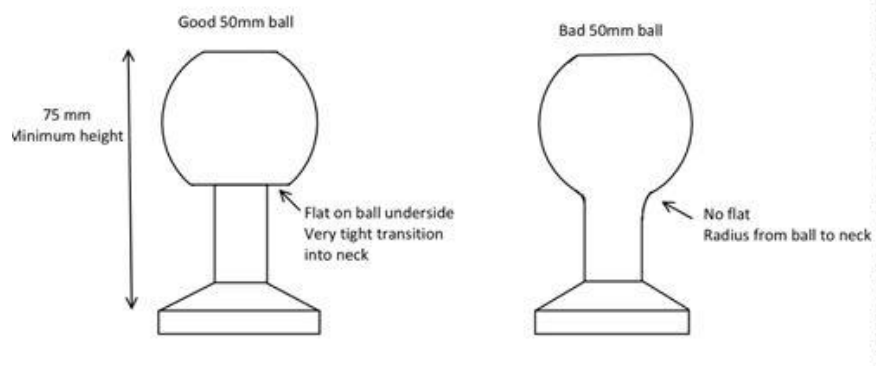

The Roof Rack Shop can supply European Towballs in the following options:

DIMENSIONS	DESCRIPTION	STOCK CODE
$\frac{3}{4}$ " - 19mm hole	Towball High Rise 50mm Iso 19mm Shaft	tbhr19mm
$\frac{7}{8}$ " - 22mm hole	Towball High Rise 50mm Iso 22mm Shaft	tb54031
1" - 25 mm hole	Towball High Rise 50mm Iso 25mm Shaft	t541030

For further information or to clarify these instructions contact us at info@theroofrackshop.co.nz